

OFFICE OF THE MARION COUNTY SURVEYOR
SECTION RECORD CORNER

SECTION 13 TOWNSHIP 14 RANGE 3

DATE: 4-29-08

PARTY CHIEF: Wilcoxon

CREW: _____

TYPE OF MARKER: Harrison fd



METHOD OF ESTABLISHMENT: County: 6-2-03

IN. S.P.C. E ZONE NAD '83

NAME: 14031304

N: 489552.5765(m)

E: 57799.3272(m)

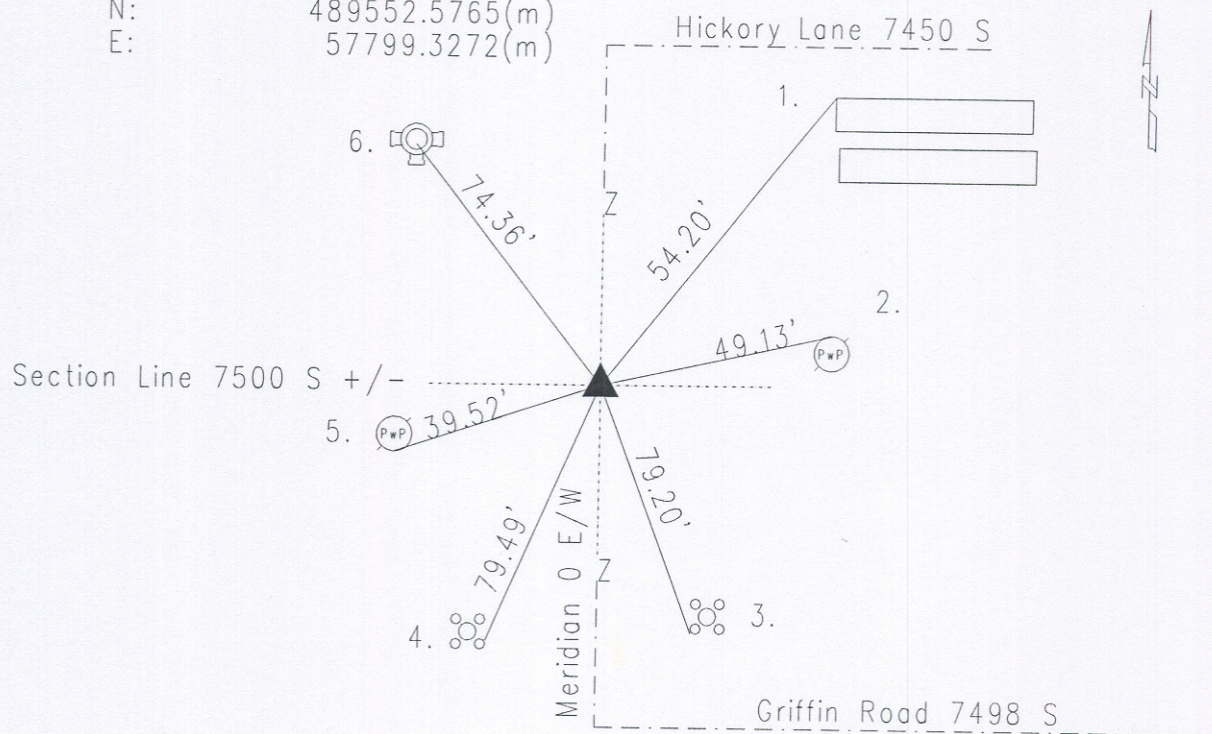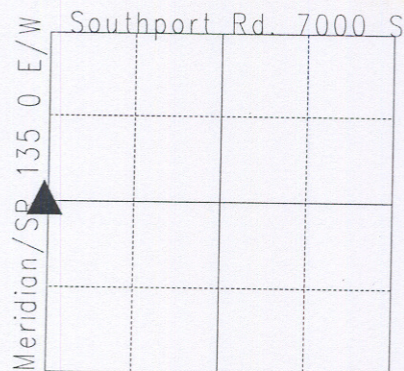

Original post set 1820 by Laughlin with witness: 10" beech N 62 W 5 links; 12" dogwood S 82 E 22 links per Marion County Atlas pg. 5. A survey by Hosbrook indicates no monument nor witness for corner per Perry Township Legal Survey Book pg. 11. Corner referenced 7/55 by Longest called a cut cross in concrete pavement. 6-3-83 GWS called the same. 6-18-75 Miller called a brass plug. Greene 6-19-86 called the same. Excavated 7-10-92 by Wilcoxon and Harrison set per State Road 135 Construction project. Re-tied 10-1-98 by kiste. Re-tied 6-20-03 by Wilcoxon. Re-tied 4-29-08 by Wilcoxon.

14031304

REF.	DISTANCE	DESCRIPTION
1.	54.20'	NW corner of brick planters
2.	49.13'	PK nail N PwP#23-756 8"up
3.	79.20'	Cut 'x' SW bolt of aluminum pole base
4.	79.49'	Cut 'x' SF bolt of aluminum pole base
5.	39.52'	PK nail S PwP#303-755 10"up
6.	74.36'	Top nut of fire hydrant